





category: carpet tile

SOKOITARI CLASSIC SOKOITARI's sister product with more subtle "IKI" images. Beautiful achromatic colors are available including biscuit-ware brown.

Composition	surface	BCF	BCF Nylon 100%		dyeing method of yarn		Solution Dyed	
	base fabric	Nonwoven Polyester		backing		PVC and Glass Fiber (Recycled PVC contained)		
	size	500mm x 500mm		overall thickness		7.5mm		
Specification	pile height	H 5.0r	nm / L 3.0mm (text					
	gauge	1/12	stitch	13.0	yarn	weight (oz/sq.yd)	23.6	

Packing	$16pcs/box = 4m^2/box$							
Net Weight	20.6kg/box							
Performance	Critical Radiant Flux	(ASTM E648)	Class 1 Average CRF 0.45/cm² or high	er				
	Smoke Density (flaming)	moke Density (flaming) (ASTM E662) Less than 450						
	Flame-retardant	Fire I	efense Law in Japan Authorized No.EOO	60066				
	Antistatic Less than 1.0kv (JIS L 1021-16, at 23 degrees centigrade, 25%RH)							
	Stain-resistant Stain Release							
	Formaldehyde Radiation	Certified No. J06-30393						
Way of Installation	↑ ↑ ↑ Monolithic or ↑ → ↑ Quarter Turn							
Recommended Adhesive from TOLI	TOLL FOO CA Compant	(vecuived acceptate	for steel or plastic sub-floor	40 to 60 gram/m <sup>2</sup>				
	TOLI ECO GA Cement	(required quantity	for mortar and wood sub-floor	60 to 100 gram/m <sup>2</sup>				
Notes on Installation	<ul> <li>Apply the adhesive on the whole surface of the sub-floor thinly and evenly. After drying, when the adhesive becomes translucent, install the tiles. Be careful not to put the tiles too tightly.</li> <li>As SOKOIRARI CLASSIC is a solid-color imaged product, the shadows of joints are sometimes visible, which is not a manufacturing defect.</li> <li>Avoid the installation at temperature of 5 degrees centigrade or lower.</li> </ul>							
Others	Please note that the product has the indigenous odor from its materials.							

MADE IN JAPAN









## CO<sub>2</sub>


## SOKOITARI CLASSIC <GX-7900>



category: carpet tile



▲ GX7905/GX7955

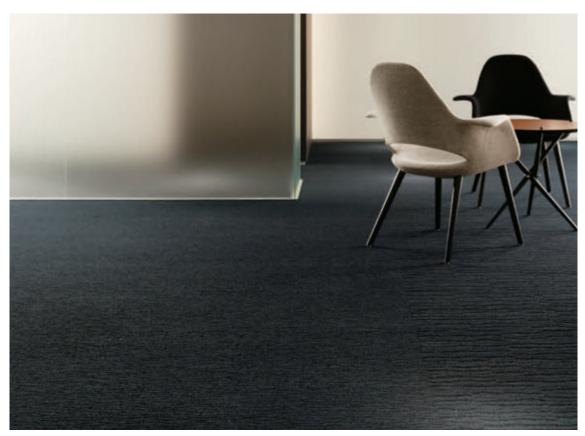

▲ GX7903/GX7953